



196-67

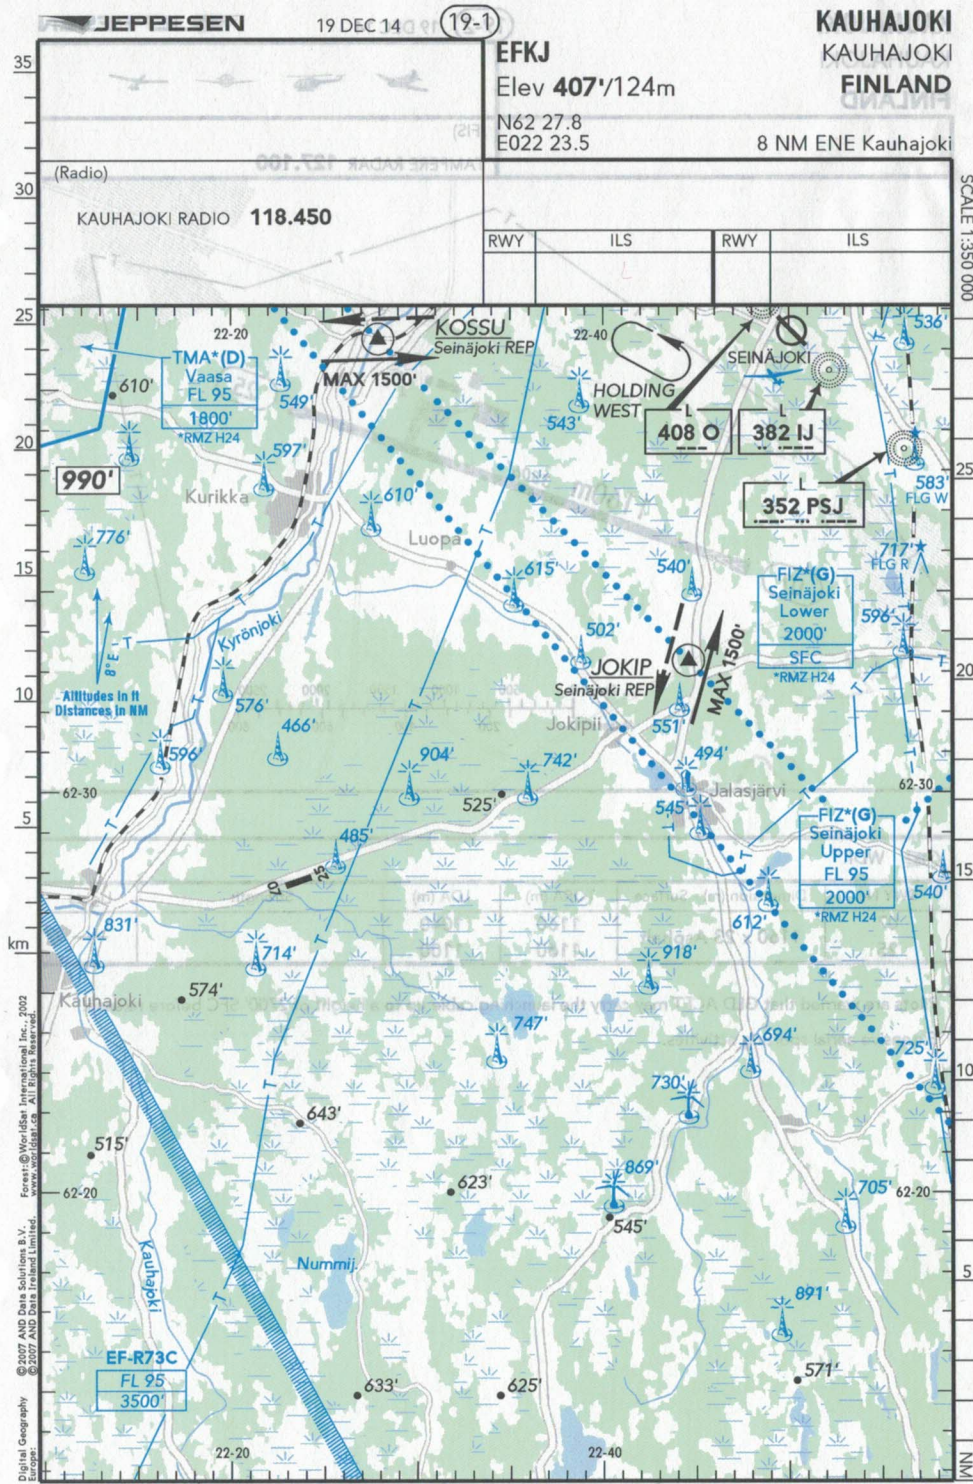

318-55

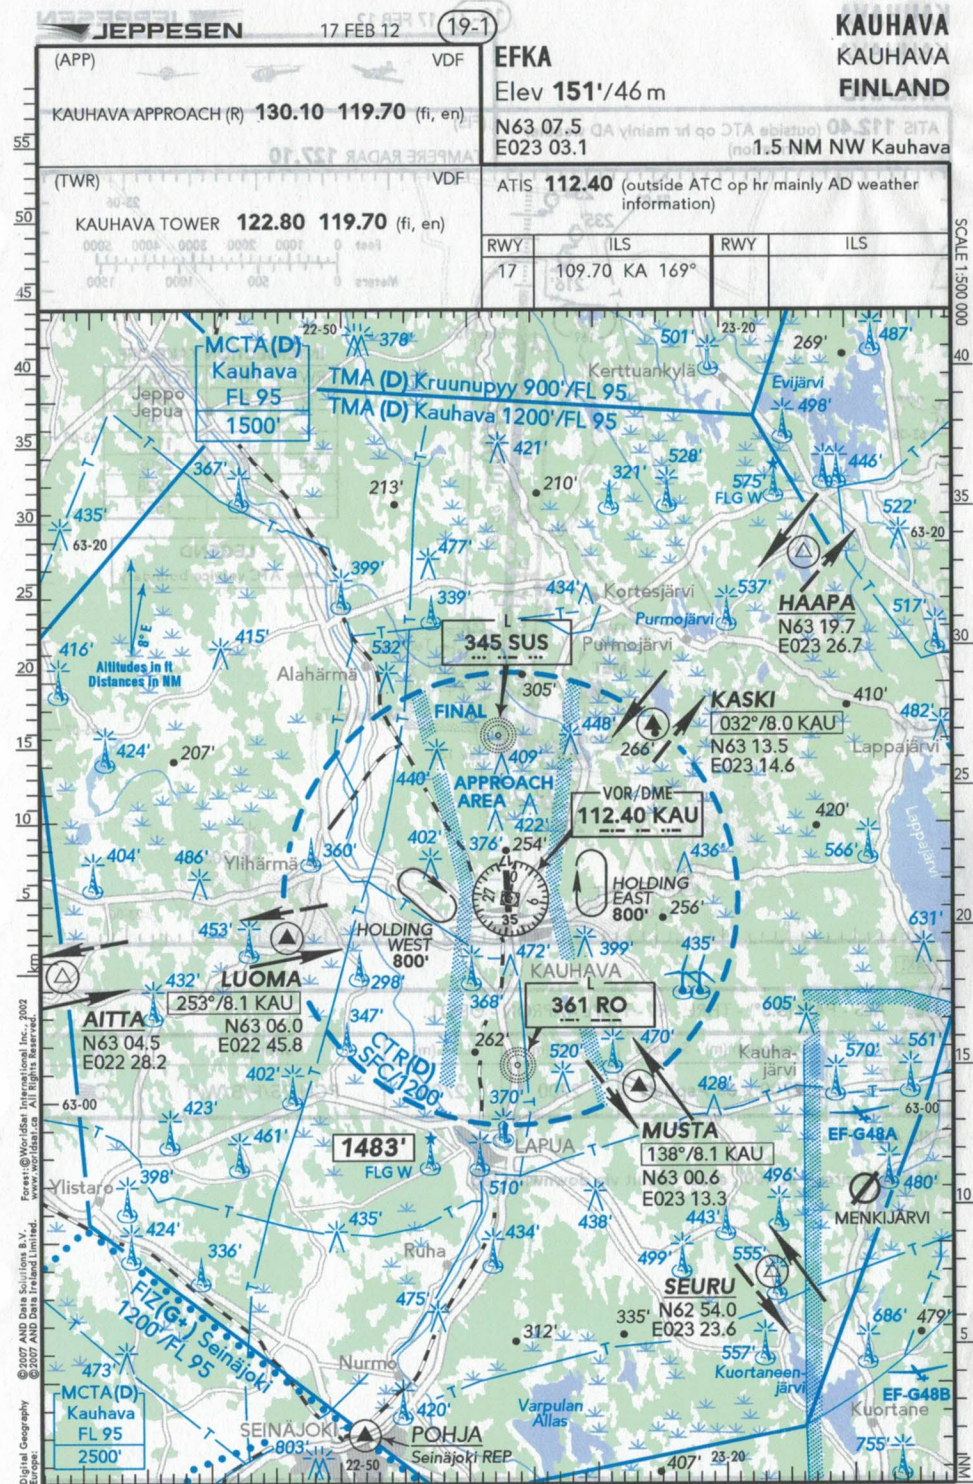

KAUHAVA
KAUHAVA
FINLAND


(19-2) 17 FEB 12

JEPPESSEN

ATIS **112.40** (outside ATC op hr mainly AD weather information)

(FIS)

TAMPERE RADAR 127.10

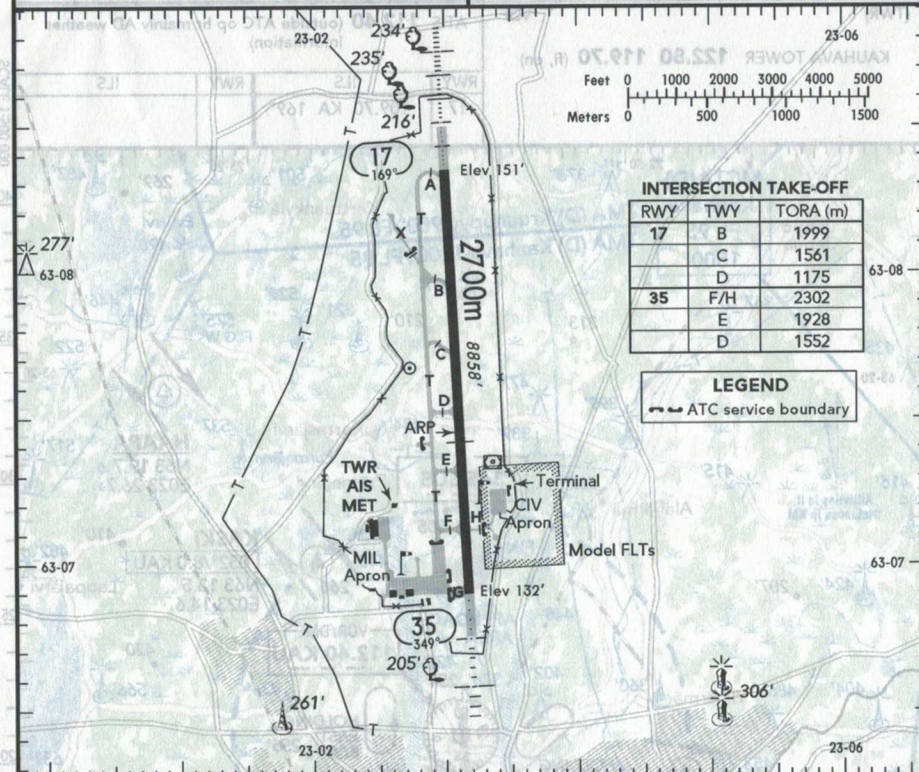

TAXI

ALS - PAPI (3.5°) - THRL - RL - TWYL - APRON - OBSTL.

RWY No.	Dimension (m) - Surface	TORA (m)	LDA (m)	Strength	Lights
17 35	2700 x 60 Asphalt	2700	2700	PCN 75/F/B/W/T	

MIL AD.

LH traffic circuit at 800', enter circuit via downwind leg.

CHANGES: Lithing - OBST - Text.

© JEPPESEN, 1996, 2012. ALL RIGHTS RESERVED.


KAUHAJOKI
KAUHAJOKI
FINLAND

(19-2) 19 DEC 14

JEPPESSEN

(FIS)

TAMPERE RADAR 127.100

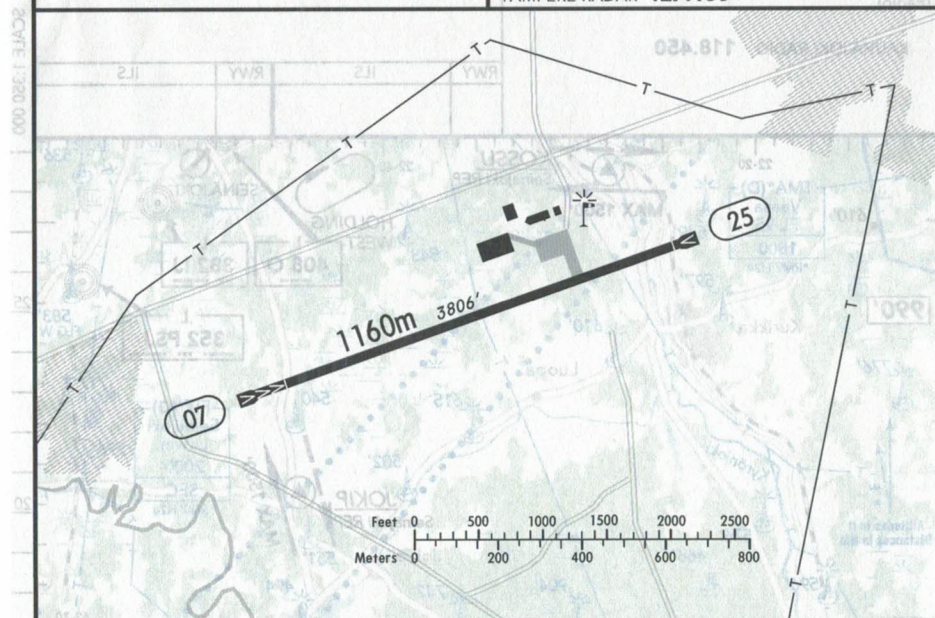 WDI.

RWY No	Dimension (m) - Surface	TORA (m)	LDA (m)	Strength	Lights
07	1160 x 23 Asphalt	1160	1040		—
25		1160	1100		

Pilots are warned that GLD ACFT may carry the launching cable up to a height of 2700' SFC before release.

Extensive aerial sporting activities.

CHANGES: Completely revised.

© JEPPESEN, 2009, 2014. ALL RIGHTS RESERVED.